



## Flush socket reader XMP-TMC24xx-UP for standard-socket-systems!

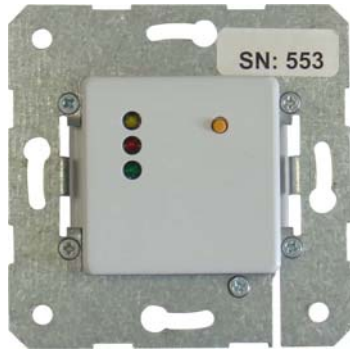

XMP-TMC24xx-UP



Backside



Dear Sirs,

From now on we offer the card readers of the series XMP-TMC24xx as flush socket readers for Hitag, Mifare and Legic. These standard housings are suitable for wall mounting in standard recess boxes.

Tested manufacturers variants:

Jung LS990  
Gira TX44

Article number	Functions
XMP-TMC2430-UP	<p><b>MIRO, HITAG(1+2) card reader without PIN-code keyboard</b> for connection to access controller. Reading of badge serial number, multi-tag feature</p> <p><b>Technical data:</b></p> <ul style="list-style-type: none"> <li>• RS485 interface (UCI / SecuCrypt® protocol) integrated</li> <li>• Sabotage contact</li> <li>• Status display via 3 LEDs, 1x beeper</li> <li>• Housing ABS, Protection type IP54</li> <li>• Can be installed in standard recess boxes (DIN 49 073)</li> <li>• Including support ring</li> <li>• Dimensions: W x H x D = 71 x 71 x 28 mm</li> </ul>

Errors and changes excepted.

File: M:\AUTEC Aktuell\2008e\doc\Akt0208e\_op.doc

Article number	Functions
<b>XMP-TMC2450-UP</b>	<p><b>13,56 MHz MIFARE® card reader</b> for connection to access controller, without PIN-code keyboard. Reading of serial number / sector-block, sector key downloadable, anticollision feature</p> <p><b>Technical data:</b></p> <ul style="list-style-type: none"> <li>• RS485 interface (UCI / SecuCrypt® protocol) integrated</li> <li>• Sabotage contact</li> <li>• Status display via 3 LEDs, 1x beeper</li> <li>• Housing ABS, Protection type IP54</li> <li>• Can be installed in standard recess boxes (DIN 49 073)</li> <li>• Including support ring</li> <li>• Dimensions: W x H x D = 71 x 71 x 28 mm</li> </ul>
<b>XMP-TMC2470-UP</b>	<p><b>13,56 MHz LEGIC® card reader</b> for connection to access controller, without PIN-code keyboard. Reading of serial number / 6 or 14 digit badge number selectable.</p> <p><b>Technical data:</b></p> <ul style="list-style-type: none"> <li>• RS485 interface (UCI / SecuCrypt® protocol) integrated</li> <li>• Sabotage contact</li> <li>• Status display via 3 LEDs, 1x beeper</li> <li>• Housing ABS, Protection type IP54</li> <li>• Can be installed in standard recess boxes (DIN 49 073)</li> <li>• Including support ring</li> <li>• Dimensions: W x H x D = 71 x 71 x 28 mm</li> </ul>
<b>XMP-TMC24-UP-001</b>	<p><b>Blind coverage (alpine white) LS 994 B WW of the company Jung.</b></p> <p>Including optical light guide for status display. The cover has a mounting clamp for easy mounting on the support ring of the reader.</p>
<b>XMP-TMC24-UP-002</b>	<p><b>Blind coverage (white) LS 994 B of the company Jung.</b></p> <p>Including optical light guide for status display. The cover has a mounting clamp for easy mounting on the support ring of the reader.</p>
<b>XMP-TMC24-UP-003</b>	<p><b>Blind coverage (light grey) LS 994 B LG of the company Jung.</b></p> <p>Including optical light guide for status display. The cover has a mounting clamp for easy mounting on the support ring of the reader.</p>

If you have any further questions, please do not hesitate to contact us.

Yours sincerely,

Your AUTEC - Team

Errors and changes excepted.

File: M:\AUTEC Aktuell\2008e\doc\Akt0208e\_op.doc